


# PBT Spacer Standoff Insulators ( Thread-M3 & AF-7.0mm)

Full Hex PBT Spacer standoff insulators available in Metric threads, in variety of heights & inserts, in Male-Female combination.

- Glow Wire Test - 960 °C
- Self-Extinguishing, UL 94 V0 Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.

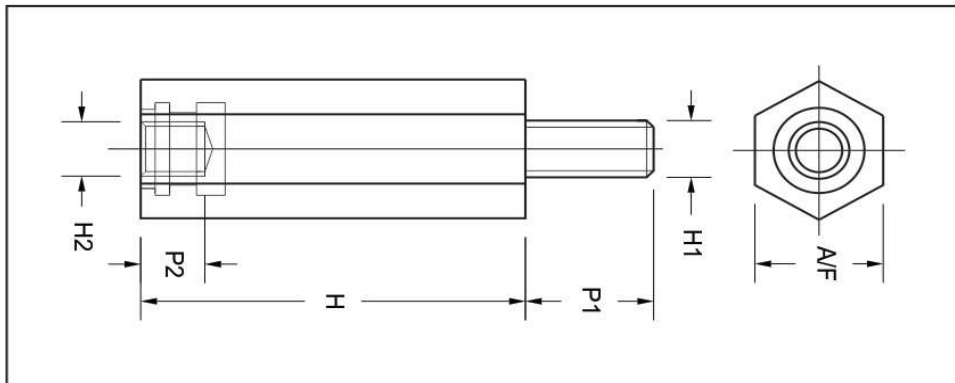

Cat No.	Dimension (mm)						
	L	H1	P1	H2	P2	TL	SW
3S15-07	15	M3	7	M3	8.5	7	7
3S20-07	20	M3	7	M3	8.5	7	7
3S25-07	25	M3	7	M3	8.5	7	7
3S30-07	30	M3	7	M3	8.5	7	7
3S40-07	40	M3	7	M3	8.5	7	7
3S55-07	55	M3	7	M3	8.5	7	7

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

----- *Global Commitment*