


PBT Spacer Standoff Insulators (Thread-M4 & AF-9.0mm)

Full Hex PBT Spacer standoff insulators available in Metric threads , in variety of heights & inserts, in Male-Female combination.

- Glow Wire Test - 960 °C
- Self-Extinguishing, UL 94 V0 Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.

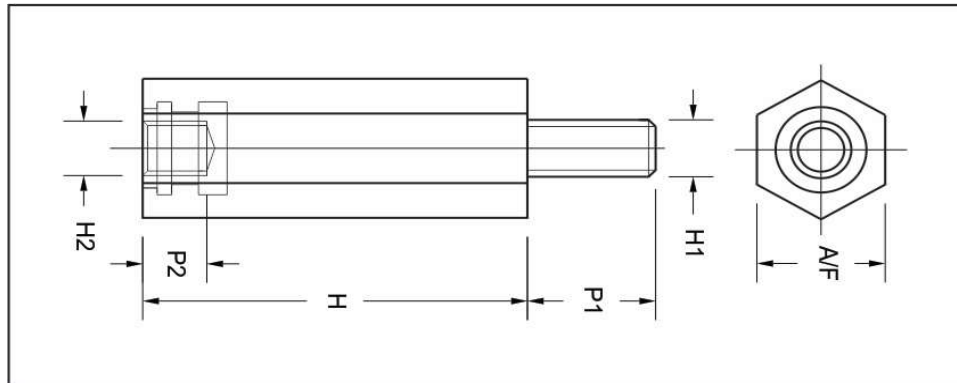

Cat No.	Dimension (mm)						
	L	H1	P1	H2	P2	TL	SW
4S15-09	15	M4	7	M4	8.5	7	9
4S20-09	20	M4	7	M4	8.5	7	9
4S25-09	25	M4	7	M4	8.5	7	9
4S30-09	30	M4	7	M4	8.5	7	9
4S40-09	40	M4	7	M4	8.5	7	9
4S45-09	45	M4	7	M4	8.5	7	9
4S55-09	55	M4	7	M4	8.5	7	9
4S60-09	60	M4	7	M4	8.5	7	9
4S90-09	90	M4	7	M4	8.5	7	9

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

----- *Global Commitment*