


## PBT Spacer Standoff Insulators ( Thread-M5 & AF-13mm)

Full Hex PBT Spacer standoff insulators available in Metric threads , in variety of heights & inserts, in Male-Female combination.

- Glow Wire Test - 960 °C
- Self-Extinguishing, UL 94 V0 Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.

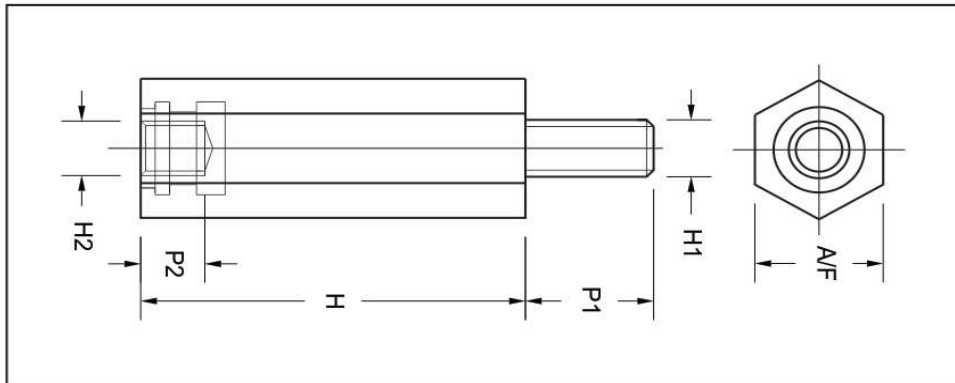

Cat No.	Dimension (mm)						
	L	H1	P1	H2	P2	TL	SW
5S15-13	15	M5	7	M5	8.5	7	13
5S20-13	20	M5	7	M5	8.5	7	13
5S25-13	25	M5	7	M5	8.5	7	13
5S30-13	30	M5	7	M5	8.5	7	13
5S45-13	45	M5	7	M5	8.5	7	13
5S55-13	55	M5	7	M5	8.5	7	13
5S70-13	70	M5	7	M5	8.5	7	13
5S85-13	85	M5	7	M5	8.5	7	13
5S120-13	120	M5	7	M5	8.5	7	13

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----*Global Commitment*