


# Cylindrical Series (Male – Female Combination) Standoff

Cylindrical Series (Male – Female Combination) standoff insulators are widely used as spacers for holding electronics circuit boards & work as insulation barrier between two conductive parts.

Our Insulators are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Recognition no. E249670.

- Glow Wire Test - 960° C
- Self-Extinguishing UL - 94 V0 Rated
- Non-Hygroscopic Material
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.

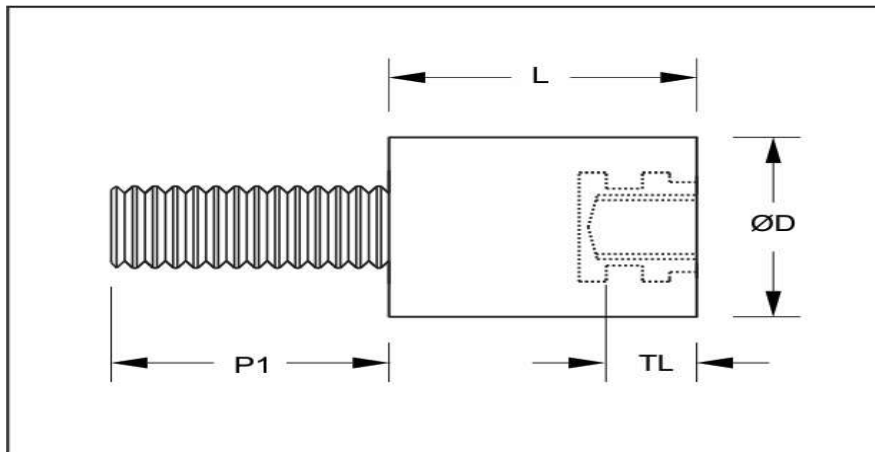

Part No	Dimension				Nominal Voltage (AC/DC)
	Ø D	L	P1	TL	
CY14.17-M5.10-F5.07	14	17	M5X10	M5X7	600/800
CY14.17-M6.15-F6.07	14	17	M6X15	M6X7	600/800
CY14.26-M4.10-F4.07	14	26	M4X10	M4X7	1000/1400

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.