

Pultruded Products (Flat Solid Profile)

Fiberglass Reinforced Polymers (FRP)



Fiberglass Reinforced Polymers

Fiber-reinforced plastics (FRP), also known as fibre-reinforced polymers, are a category of composite plastics specifically using fibre materials to mechanically augment the elasticity and strength of the plastic. They consist of a polymer matrix – the original plastic which is usually tough but weak – which is blended with a reinforcing material to yield a final product with the desired material or mechanical properties.

Why FRP:

- Corrosion Resistance

FRP is **corrosion resistant**, and the main reason for using fibre-glass-reinforced plastics (FRP) is that they are inherently corrosion resistance. Moreover, FRP is the only material that will handle a given service environment. Light in weight FRP is lesser in weight and has a low pressure to strength ratio and requires one-seventh in quantity as against steel half needed half in weight as aluminium.

-More Strength

Fiberglass reinforced plastic (FRP) has high strength in forming equipment for the various application be its use in missile or boat or bathtubs.

Affordable

FRP is economic from the manufacturing point of view, and affordability is a crucial factor over other materials to be used.

Flexibility

FRP material is flexible, and this quality makes favourite in choice over other content. Saves labour cost and easy installation One more advantage of FRP is that it helps in cutting expenses on labour and installation.

Fast construction speed


FRP helps in increasing the speed of construction of equipment and less time consuming from the industry's point of view.

Durability

FRP is durable and has a long life than steel or aluminium and lasts longer and yet more productive service life and requires no replacement nor much maintenance.

Electrically & thermally non-conductive:

FRP is electrically non-conductive leading to increased safety compared to conductive materials (i.e., metal).

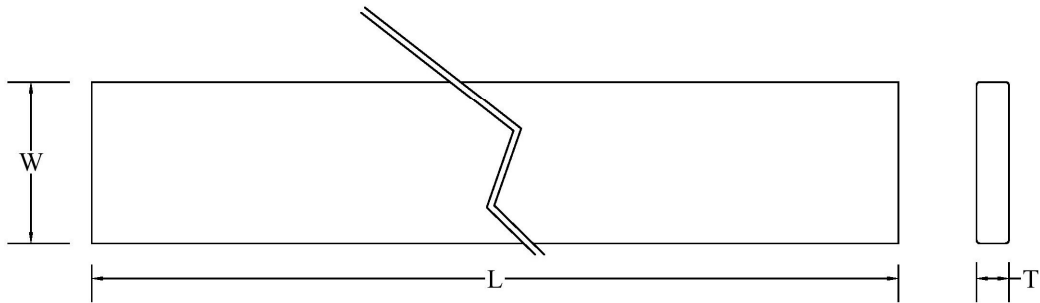

POWERMAT CODE	W	T	wt. (Kg/meter)
PF03225	255	3	1.300
PF1030	30	10	0.635
PF1040	40	10	0.800
PF1050	50	10	1.750
PF1070	70	10	1.400
PF10100	100	10	2.100
PF2040	40	20	1.600
PF2050	50	20	2.105
PF2060	60	20	2.480
PF2626	26	26	1.360
PF3050	50	30	3.200
PFXX500	500	xx	-

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.