


Polyamide T type Busbar Supports

Polyamide T type Busbar Support offers versatile solution for holding of different busbars width & thickness. It acts as a cantilever support & can use as spacer in between two busbars. It also offers flexibility in fixing of busbars at desired location.

- Glow Wire Test - 960 °C
- Self-Extinguishing, UL 94 V0 Rated
- Halogen Free
- Operating Temperature range from (-) 40°C to 130°C.

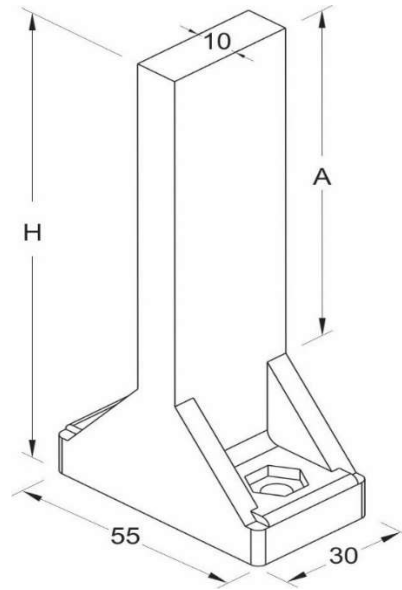

| Dimensions | | |
|---------------|------|------|
| POWERMAT Code | H mm | A mm |
| PAT – 85 | 85 | 52 |
| PAT - 125 | 125 | 94 |

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.

-----*Global Commitment*